


Short clamping jaws 75°

Through the undercut at the jaws, the workpiece is held securely during machining.
Only 3 mm clamping depth are necessary.

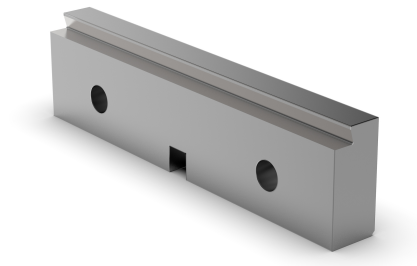

Scope of delivery

- 2 Short clamping jaws 75°

Note

- Form cutters to prepare your work pieces are available on request.

Web

See below for more details and accessories

<https://produkte.spreitzer.de/en/clamping/clamping-jaws/short-clamping-jaws-750-232>.

Material

- Steel

Finish

- Hardened, grinded

Working steps

1. Saw raw material
2. Machining dovetail contour
3. Clamping raw material




Short clamping jaws No. B209800105 front view



Short clamping jaws No. B209800105 from the right



Short clamping jaws No. B209800105 from the left



Short clamping jaws No. B209800105 from above



Short clamping jaws No. B209800105 from below

Finish	Order Number	Suitable for	L [mm]	B [mm]	H1 [mm]	H2 [mm]
B209800117	B209800117	MZE 80-36,MZE 80-36 VA,MZE 120-36	36	6	9	12
B209800104	B209800104	MZE 120-60,MZE 170-60	60	11	17	21
B209800170	B209800170	MZE 150-80,MZE 220-80	80	11	20	24
B209800105	B209800105	MZE 190-100,MZE 280-100	100	11	22	26
B209800106	B209800106	MZE 240-125,MZE 360-125,MZE 500-125	125	14	28	32

Note: Your selected variants are marked in orange.

