


Vacuum plate with high holding force is made from cast aluminium. The integrated threaded grid holes and the workpiece stops provide great flexibility in positioning the workpiece to be machined. For milling of breakthroughs is the use of adapter mats necessary.

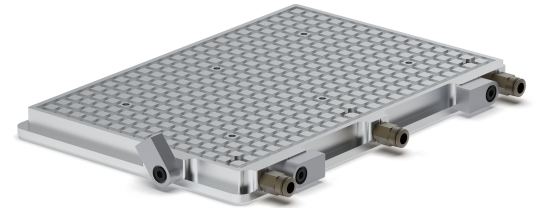

Scope of delivery

- 1 Vacuum plate
- 1 Vacuum distributor
- 1 Vacuum hose
- 1 Sealing rubber cord
- 1 PVC adapter mat

Strong Points

- + Price attractive basic model
- + High holding power
- + Low requirements on the vacuum generator

Web

See below for more details and accessories

<https://produkte.spreitzer.de/en/clamping/vacuum-clamping-technology/vacuum-plates/vacuum-plate-spvpl-basic-gs-641>.

Material

- High strength aluminum

Finish


- Grinded functional surfaces: Parallelism 0,007/100 mm




Vacuum plate SPVPL Basic No. B900501275-GS Front view



Vacuum plate SPVPL Basic No. B900501275-GS from the right



Vacuum plate SPVPL Basic No. B900501275-GS from the left

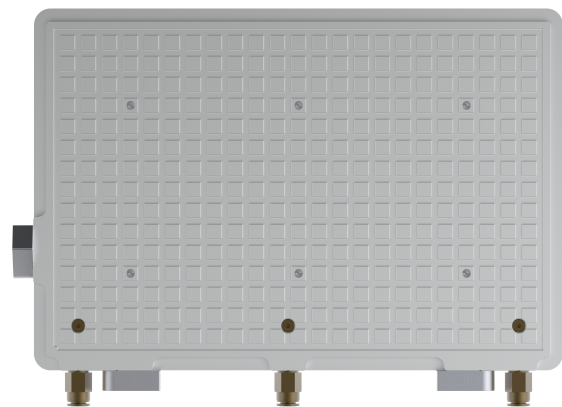

Vacuum plate SPVPL Basic No. B900501275-GS from above



Vacuum plate SPVPL Basic with accessories

Finish	Order Number	Dimensions [mm]	Clamping surface [mm]	Suction points	Weight [kg]
SPVPL 2012 Basic GS	B900501232-GS	216x136x20	200x120	2	2,5
SPVPL 1818 Basic GS	B900501318-GS	180x180x30	180x180	2	4
SPVPL 2020 Basic GS	B900501274-GS	216x136x20	200x200	2	4
SPVPL 3020 Basic GS	B900501275-GS	316x216x20	300x200	3	6
SPVPL 2828 Basic GS	B900501319-GS	280x280x30	280x280	3	7,5
SPVPL 4020 Basic GS	B900501265-GS	416x216x20	400x200	4	7,5
SPVPL 4030 Basic GS	B900501210-GS	416x316x20	400x300	4	12
SPVPL 5030 Basic GS	B900501276-GS	516x316x20	500x300	5	16
SPVPL 5040 Basic GS	B900501256-GS	516x416x20	500x400	5	20
SPVPL 6040 Basic GS	B900501207-GS	616x416x20	600x400	6	24
SPVPL 7050 Basic GS	B900501216-GS	716x516x20	700x500	7	28
SPVPL 10040 Basic GS	B900501277-GS	1016x416x20	1000x400	10	30
SPVPL 10060 Basic GS	B900501278-GS	1016x616x20	1000x600	10	41

Note: Your selected variants are marked in orange.